

Welcome!

Welcome to the Public Information Center for the St. Patrick Street Reconstruction Project

Please Sign in

- The purpose of this meeting is to present the design for the project and provide a chance for others to comment on the design.
- Take your time and review the project materials and displays that are presented.
- The City of Kawartha Lakes and Engage Engineering staff are available to discuss any questions or concerns you may have.
- The Municipality is completing this project to reconstruct the road and its underground infrastructure from the northmost end of St. Patrick Street to Queen Street.



Study Area

This project involves the reconstruction of St. Patrick Street, including the intersection within to the limits of the North end to Queen Street



Proposed Work


The Municipality is completing this project to reconstruct the road structure and the underground infrastructure from the northmost end of St. Patrick Street to Queen Street. The proposed work includes the following:

- New road structure and asphalt
- Remove and replace the existing sanitary sewer with new sewer
- Remove and replace the existing watermain with new watermain
- Replacement and extension of the existing storm sewer to improve drainage and capacity
- Some roadway and boulevard grading changes to improve drainage
- Driveway removal and restoration to the property line
- Water and sanitary service replacement to the property line
- Roadway widening and new concrete curb throughout
- New 1.5m to 1.8m concrete sidewalk
- Regrading and removal of most ditching from Needham Street to North most end of St. Patrick Street

Cross Section

Needham Street To Colborne Street

Colborne Street To Queen Street

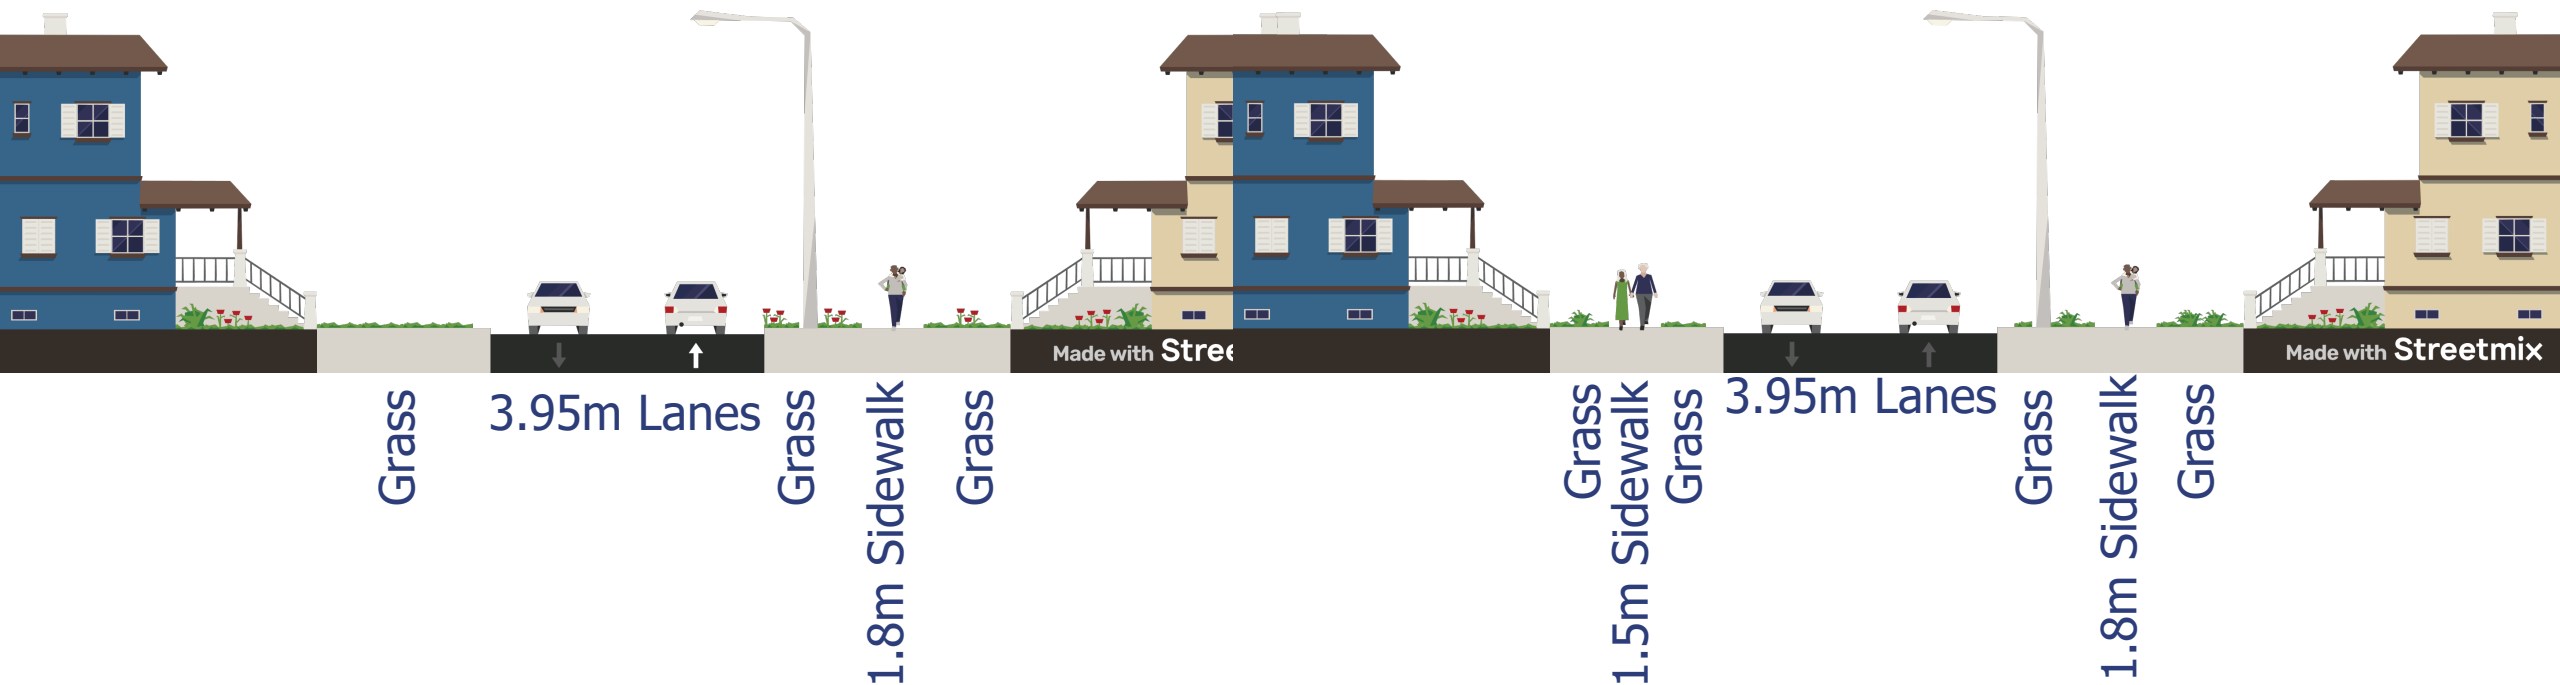

Project Schedule

- November 3, 2025 Public Information Center
- Spring/Summer 2026 Phase 1 of Construction
- To Be Determined Phase 2 of Construction

Construction info

- Construction will be split into 2 phases
- The roads being reconstructed will remain open to local traffic during construction. Lane restrictions will be required to complete the installation of underground infrastructure
- Access will be maintained to all residences during construction. Short interruptions will be required for certain work, including sidewalk. 48 hours' notice will be provided prior to any access interruption
- A representative of Engage Engineering or the City of Kawartha Lakes will be on site during construction and available to answer any questions or address issues that arise