
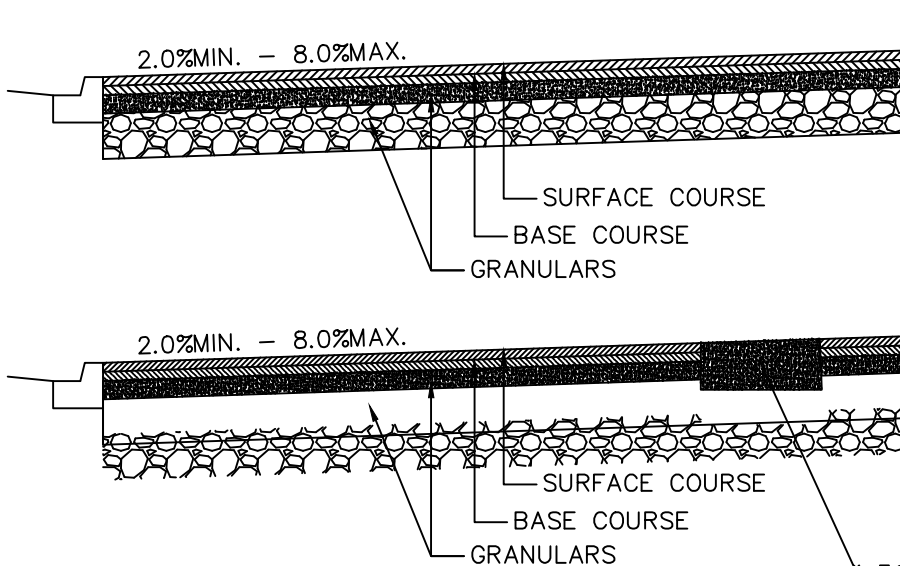


PAVEMENT DESIGN

COMMERCIAL, INDUSTRIAL, INSTITUTIONAL, APARTMENTS:
 40mm OF HL3 ASPHALT SURFACE COURSE
 75mm HL8 ASPHALT BASE COURSE
 150mm GRAN. 'A'
 300mm GRAN. 'B'

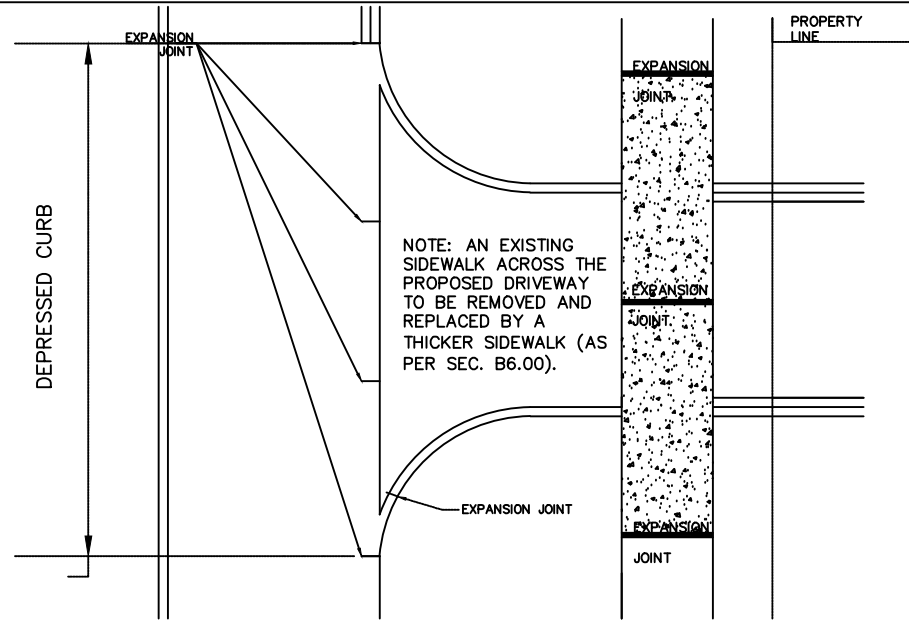

SEE CKL 414 FOR RURAL.

1.50m SIDEWALK

ENTRANCEWAY GEOMETRICS	DIMENSION REFERENCE (See Fig. 1)	URBAN			RURAL		
		Res.	Com.	Ind.	Res.	Com.	Ind.
Width (m)	W						
Minimum		3.5	4.5	6.0	4.9	5.5	6.0
Maximum		7.5	10.0	12.0	9.0	10.0	15.0
Right Turn Radius (m)	R						
Minimum		1.5	3.0	4.5	3.0	4.5	7.5
Maximum		4.5	15.0	15.0	7.5	15.0	15.0
Minimum Spacing (m)							
From Property Line	P	R	R	R	R	R	R
From Point of Tangency	C	1.5	3.0	3.0	12.0	17.0	17.0
Between Driveways	S	1.5	1.5	1.5	7.5	7.5	7.5
Angle	A	70	70	70	70	70	70

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE NOTED

DATE: 2011 06	CKL STANDARD DETAIL COMMERCIAL, INDUSTRIAL AND APARTMENT DRIVEWAY DETAIL	NOT TO SCALE
DRAWN: IB		REVISION No. 0
CHECKED: --		DATE:
APPROVED: --		CKL-409